

EVOLUTE™ absolute optical encoder with Mitsubishi serial communications



Incorporating industry-proven technology from the RESOLUTE™ encoder series, EVOLUTE™ is a true-absolute 50 µm scale period optical encoder with wide installation tolerances and high immunity to dirt.

Using a scale period of 50 µm gives the EVOLUTE encoder system a generous 500 µm rideheight tolerance and its single-track optics are optimised for contamination resistance. Data redundancy encoded into the robust scale minimises the risk of positional error while sophisticated error checking mechanisms ensure an error flag is always asserted when the position cannot be determined.

The EVOLUTE system provides absolute position with resolution options down to 50 nm. Advanced optical design and high-speed signal processing mean sub-divisional error (SDE) is as low as ±150 nm with noise (jitter) below 10 nm RMS.

EVOLUTE encoders are mechanically identical to RESOLUTE encoders and are supplied with the RTLA50 scale that can be used, either in its self-adhesive form, RTLA50-S, or in the *FASTRACK*™ scale carrier system.

- True absolute non-contact optical encoder system: no batteries required
- Wide set-up tolerances for quick and easy installation
- Integral set-up LED enables easy installation and provides diagnostics at a glance
- Enhanced immunity to dirt, scratches and light oils
- Resolution options of 50 nm, 100 nm and 500 nm
- 100 m/s maximum speed for all resolutions
- ±150 nm sub-divisional error for smooth velocity control
- Less than 10 nm RMS jitter for improved positional stability
- Built-in separate position-checking algorithm provides inherent safety
- Readhead is reversible for flexible mounting. Scale orientation defines count direction only
- Scale lengths up to 10.02 m
- Operates up to 80 °C
- Integral over-temperature alarm

Compatible with:

- RTLA50-S self-adhesive tape scale
- RTLA50 with *FASTRACK* carrier
- Optional Advanced Diagnostic Tool ADTa-100

Resolutions and scale lengths

EVOLUTE with Mitsubishi serial comms is available with 50 nm, 100 nm, and 500 nm resolution options.

The maximum reading speed is 100 m/s.

The maximum scale length is as described in the scale specifications below: i.e., it is not limited by absolute word length.


Contact your local Renishaw representative for details of other serial protocols.

Scale specifications

For more detailed scale information refer to the relevant scale data sheet.

Description	RTLA50-S	Self-adhesive hardened stainless-steel tape scale for high performance motion control systems requiring easiest installation. Lengths up to 10.02 m
	RTLA50/FASTRACK	Carrier-mounted hardened stainless-steel tape scale for high performance motion control systems requiring easier and faster scale installation and field replacement. RTLA50 lengths up to 10.02 m FASTRACK lengths up to 25 m
Accuracy (at 20 °C)		±10 µm/m
Coefficient of thermal expansion (at 20 °C)		10.1 ±0.2 µm/m/°C

General specifications

Power supply	5 V ±10%	1.25 W maximum (250 mA @ 5V) NOTE: Current consumption figures refer to terminated EVOLUTE systems. EVOLUTE encoder systems must be powered from a 5 Vdc supply complying with the requirements for SELV of standard IEC 60950-1
	Ripple	200 mVpp maximum @ frequency up to 500 kHz
Temperature	Storage	-20 °C to +80 °C
	Operating	0 °C to +80 °C
Humidity		95% relative humidity (non-condensing) to IEC 60068-2-78
Sealing		IP64
Acceleration (readhead)	Operating	500 m/s ² , 3 axes
Shock (readhead)	Non-operating	1000 m/s ² , 6 ms, ½ sine, 3 axes
Maximum acceleration of scale with respect to readhead		2000 m/s ²
		NOTE: This is the worst case figure that is correct for the slowest communications clock rates. For faster clock rates, the maximum acceleration of scale with respect to the readhead can be higher. For more details, contact your local Renishaw representative.
Vibration	Operating	300 m/s ² , 55 Hz to 2000 Hz, 3 axes
Mass	Readhead	18 g
	Cable	32 g/m
Readhead cable		7 core, tinned and annealed copper, 28 AWG
		Single-shielded, outside diameter 4.7 ±0.2 mm
		Flex life > 40 × 10 ⁶ cycles at 20 mm bend radius
		UL recognised component 

Optional Advanced Diagnostic Tool ADTa-100



The EVOLUTE encoder system is compatible with the Advanced Diagnostic Tool ADTa-100* and ADT View software, which acquire detailed real-time data from the readhead to allow easy set-up, optimisation and in-field fault finding.

The intuitive software interface provides:

- ▶ Digital readout of encoder position and signal strength
- ▶ Graph of signal strength over the entire axis travel
- ▶ Ability to set a new zero position for the encoder system
- ▶ System configuration information


*ADTa-100 compatible readheads are marked with the symbol **ADT**

EVOLUTE installation drawing (RTLA50 and FASTRACK)

For further details, including side-exit version, refer to EVOLUTE RTLA50/FASTRACK installation guide (M-6183-9040)



Dimensions and tolerances in mm

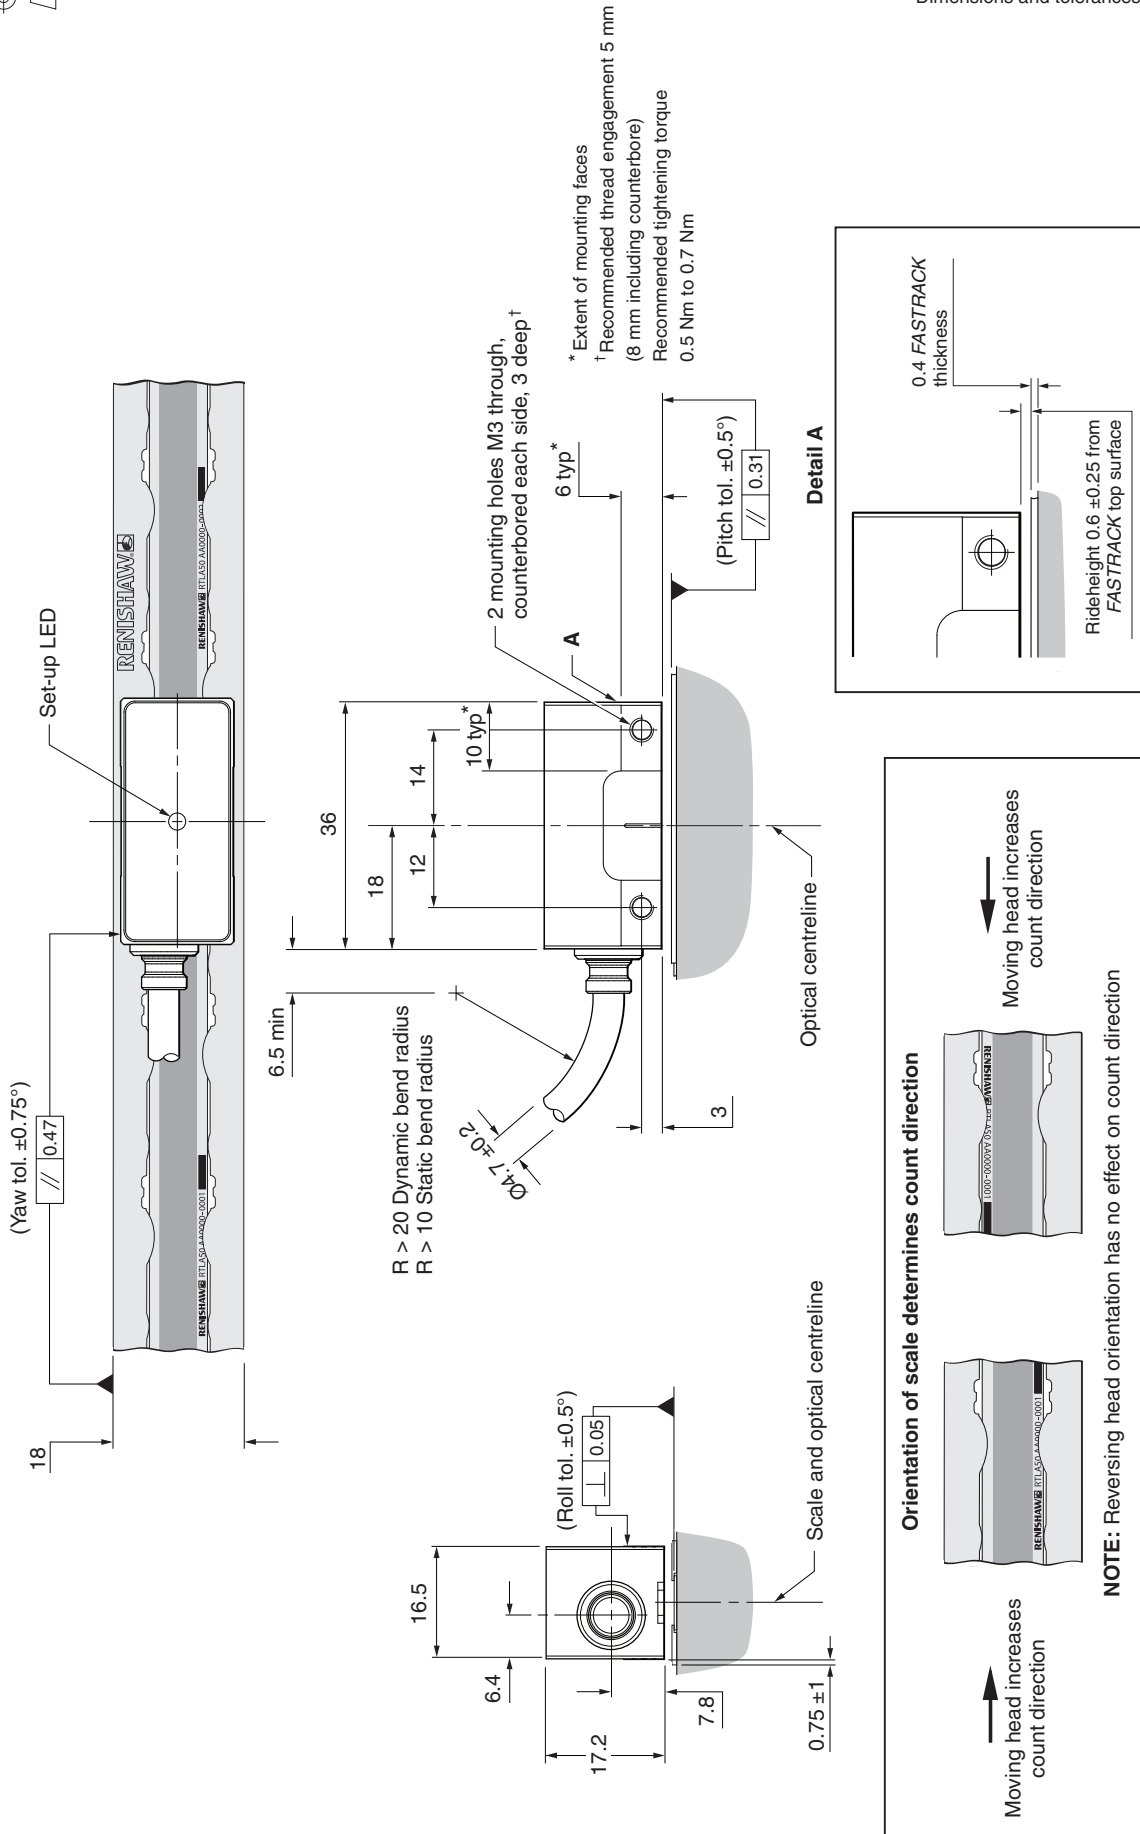


EVOLUTE installation drawing (RTL50-S)

For further details, including side-exit version, refer to EVOLUTE RTL50-S installation guide (M-6183-9046)



Dimensions and tolerances in mm

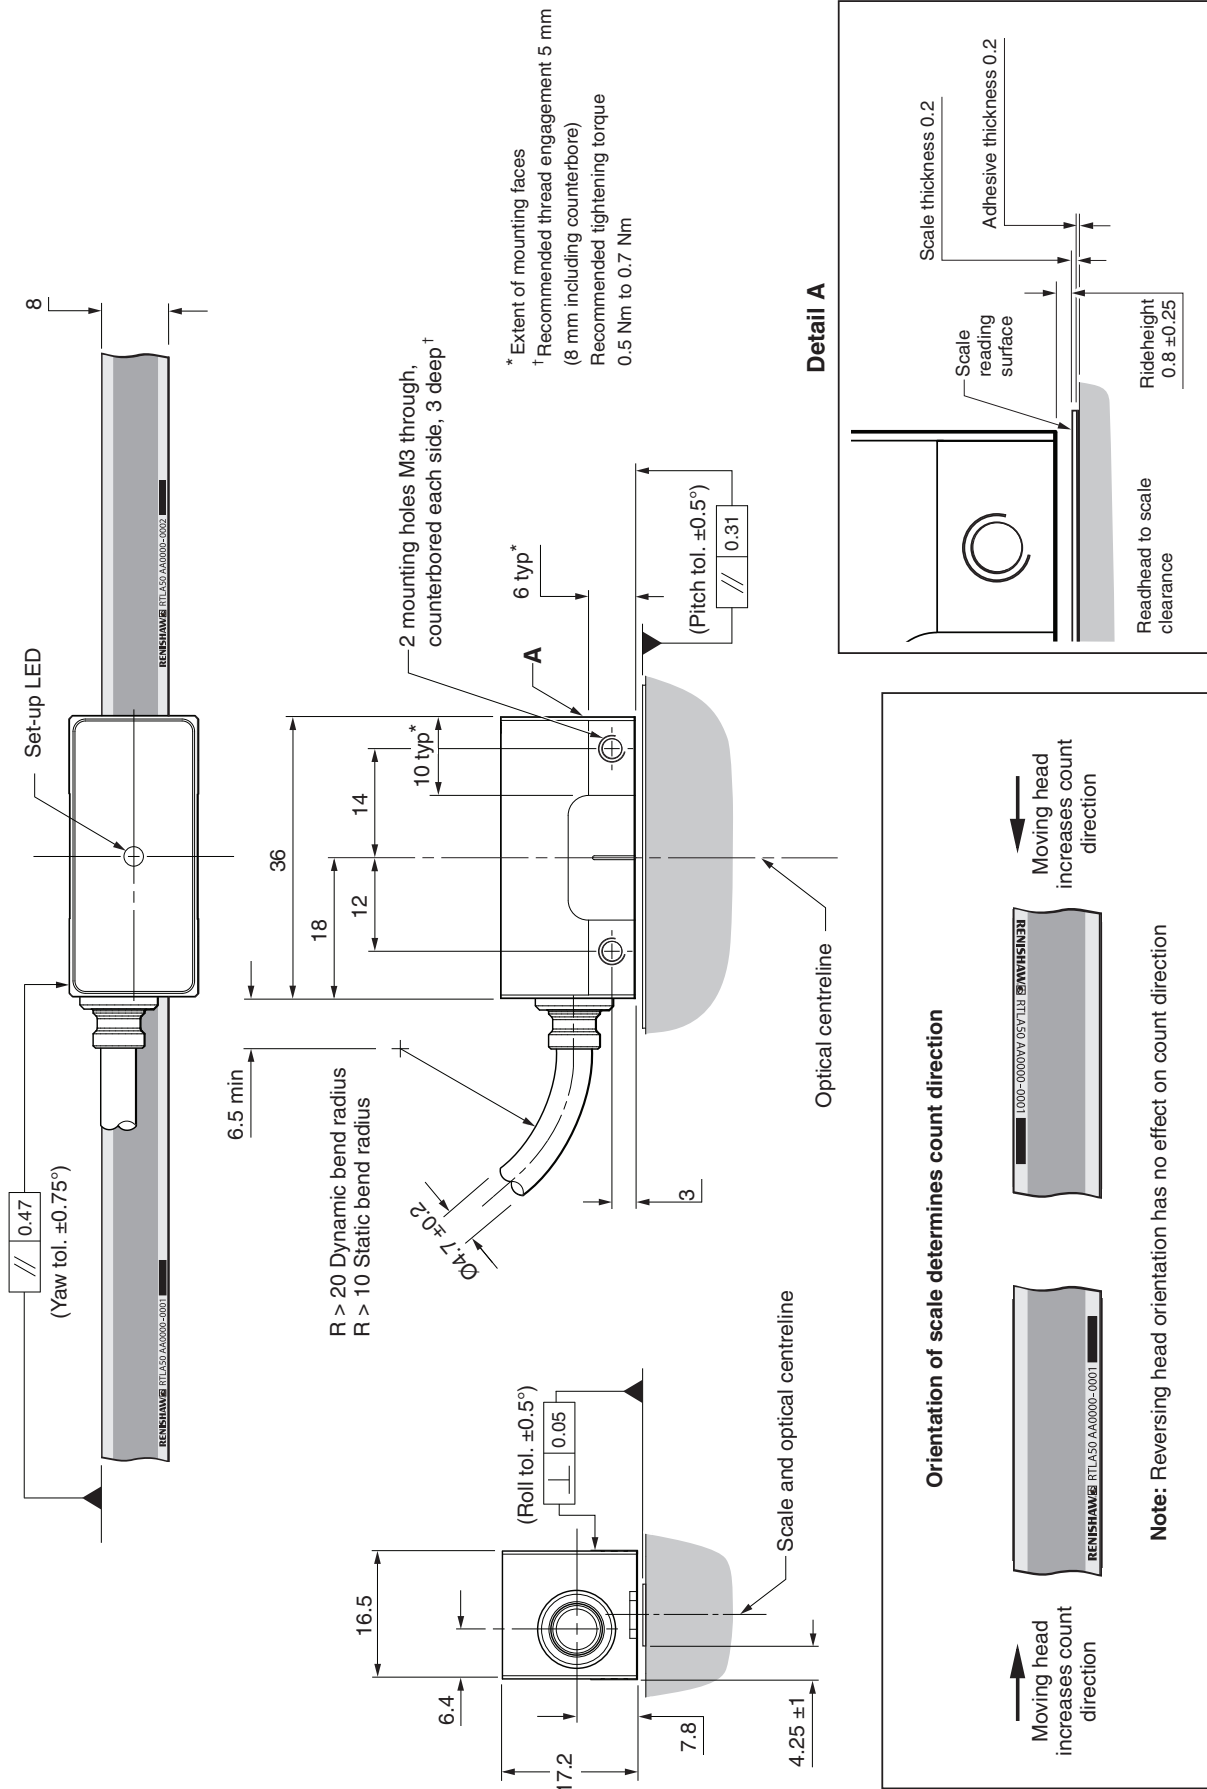

EVOLUTE linear nomenclature

EL 40M BB 050 F 30 A

Series

E = EVOLUTE

Scale form

L = Linear

Protocol

40M = Mitsubishi 40 bit 2 wire*

Mechanical option

B = Standard IP64
 R = Side cable outlet IP64

Gain option

B = RTLA50/RTLA50-S

Resolution

050 = 50 nm
 100 = 100 nm
 500 = 500 nm

Scale code option

F = RTLA50/RTLA50-S

Cable length

05 = 0.5 m
 10 = 1.0 m
 15 = 1.5 m
 30 = 3.0 m

Termination

A = 9 way D-type connector

For scale nomenclature see RTLA50 data sheet L-9517-9628.

* 2 wire: MR-J4 series/MR-J5 series

NOTE: For more information about Mitsubishi drives, contact Mitsubishi.

EVOLUTE compatible products



BiSS
 FANUC
 Mitsubishi
 Panasonic
 Siemens DRIVE-CLiQ
 Yaskawa



RTLA50-S self-adhesive tape scale



RTLA50 tape scale and FASTRACK carrier



Advanced Diagnostic Tool
 ADTa-100 (A-6525-0100)

For more information about ADTa-100 and the scale refer to the relevant data sheets and installation guides which can be downloaded from www.renishaw.com/opticalencoders

For worldwide contact details, visit www.renishaw.com/contact

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

© 2015–2020 Renishaw plc. All rights reserved.
 Renishaw reserves the right to change specifications without notice.
RENISHAW and the probe symbol used in the RENISHAW logo are registered trade marks of Renishaw plc in the United Kingdom and other countries.
apply innovation and names and designations of other Renishaw products and technologies are trade marks of Renishaw plc or its subsidiaries.
 BiSS® is a registered trade mark of iC-Haus GmbH.
 All other brand names and product names used in this document are trade names, trade marks or registered trade marks of their respective owners.



L - 9517 - 9622 - 02

Part no.: L-9517-9622-02-A
 Issued: 01.2020